

PACER®

SERIES 'I' SELF-PRIMING CENTRIFUGAL PUMPS

HORIZONTAL ... LONG or CLOSE COUPLED

**CHEMICALS / WASTES / ACIDS
INDUSTRIAL LIQUIDS / OILFIELD
AQUACULTURE / AGRICULTURE**



- **Corrosion resistant materials**
Stainless steel casing, fiberglass reinforced polyester, polypropylene or Ryton® internals with choice of elastomers. See chemical resistance chart for compatibility.
- **Suction lift to 20 feet (6m) vertical***
- **Flows to 170 GPM or 75 feet TDH**
(To 650 LPM or 23m TDH)
- **Dual ports 1½" female and 2" male NPT or BSP**
- **Built-in check valve and double flush volute**
- **Close coupled, long coupled or pedestal mounted**
- **Gasoline engine, TEFC electric, hydraulic or pneumatic motors**
- **Wetted metallic components are 316 stainless steel**

SERIES 'I' self-priming pumps are constructed with 316 stainless steel housing, fiberglass reinforced polyester, polypropylene or Ryton® internals, EPDM, Buna-N or Viton® elastomers, stainless steel external hardware and quick release clamp. All pumps include a built-in check valve and a double flush volute. Series 'I' pumps are close coupled to gasoline engines; or electric, hydraulic and pneumatic motors to fit most power requirements. They may also be pedestal mounted for long coupling to electric or gasoline drivers; or for flexible coupling to the users driver. This lightweight, self priming pump provides corrosion resistance and efficient performance for a wide variety of water and corrosive liquid applications.

* Based on water-like liquids at 70 degrees F and at 3450 RPM after initial priming of pump housing.

* Consult factory for model numbers containing Polypropylene or Ryton® components.

SERIES 'I' SELF-PRIMING PUMP specifications

Pump with electric, hydraulic or pneumatic drive close-coupled or pedestal mounted for flexible coupling

Pump constructed with stainless steel housing. Glass reinforced Polyester internal parts, stainless steel housing clamp and internal fasteners, EPDM elastomers and check valve, polypropylene baseplate with close-coupled electric motors, steel baseplate with close-coupled hydraulic and pneumatic models. Consult factory for polypropylene and Ryton® internal components



FLOW CURVE LETTER (RPM)	PORT SIZE in.	MAX. FLOW RATE		MAX. TDH		HP REQ'D	Hz	MODEL NUMBER	PRICE CODE NUMBER	ADD TO MODEL & PRICE CODE NO...			
		GPM	LPM	ft.	m					ELECTRIC MOTOR 60 Hz			
G (3450)	1-1/2/2	170	650	72	22	3	60	ISE2GL-	58-52G4	115/230V/1/60	230/460V/3/60	TEFC C3.0C	TEFC D3.0C
G (3450)	1-1/2/2	170	650	72	22	3	--	ISE2GL -	58-52G4	HYDRAULIC PNEUMATIC			
G (2900)	1-1/2/2	140	530	50	15	2	--	ISE2GL -	58-52G4	HYC --			
										PEDESTAL MOUNTED			
G (3450)	1-1/2/2	170	650	72	22	3	60	ISE2GL-	58-52G4	CSS			

* Consult factory for 50 Hz motors and performance

PUMP WITH GASOLINE ENGINE DRIVE


Pump constructed with 316 stainless steel housing. Glass reinforced polyester internal parts, stainless steel housing clamp, 316 SS internal fasteners, EPDM O-rings, gasket, and check valve.




FLOW CURVE LETTER (RPM)	PORT SIZE in.	MAX. FLOW RATE		MAX. TDH		HP REQ'D	SHIP WT.	MODEL NUMBER	PRICE CODE NUMBER	ADD TO MODEL & PRICE CODE NO...		
		GPM	LPM	ft.	m					GASOLINE ENGINE		
W (3600)	1 1/2	170	650	75	23	3 or 5	50	ISE2WL-	58-52W4	127cc E550 (B&S)	160cc E5HCP HONDA	205cc E950 (B&S)

NOTE: All gasoline engine drive SERIES 'I' pumps come with roll cage as shown.

FLOW CURVES

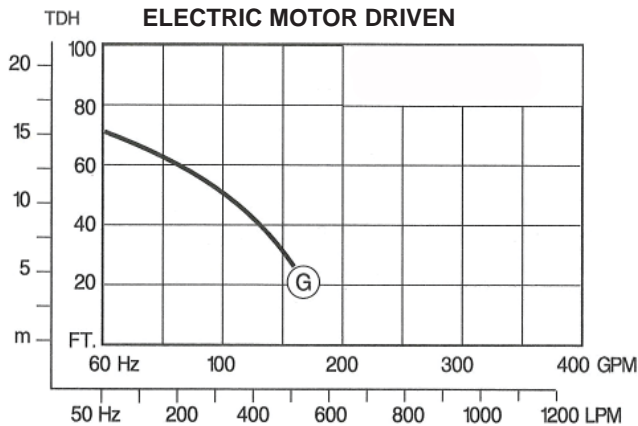

Flow curves based on water S.G. = 1.0, 2" connections

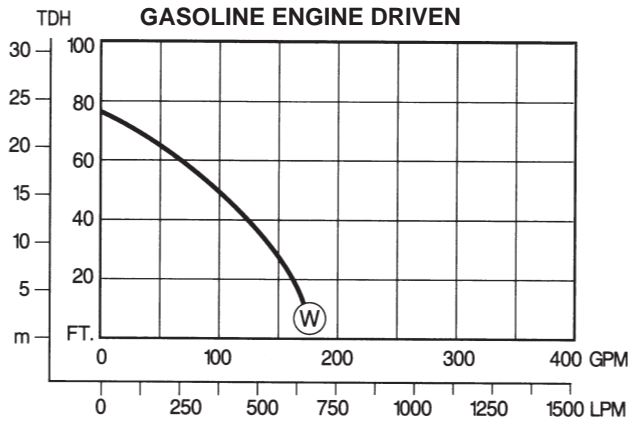

Specifications subject to change without notice